



Construction of a Simple Transformer to Illustrate Faraday's Law of Electromagnetic Induction along Side Mutual Inductance

K. O. Rauff¹, Aliyu Rilwan^{1*}, U. Abubakar Farouk¹ and D. Dogo Joshua¹

¹Department of Physics, Federal University Kashere, Gombe State, Nigeria.

Authors' contributions

This work was carried out in collaboration between all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/PSIJ/2016/28280

Editor(s):

- (1) Bheemappa Suresha, Department of ME, The National Institute of Engg, Mysore, India.
(2) Abbas Mohammed, Blekinge Institute of Technology, Sweden.

Reviewers:

- (1) Deqiang Zhou, Jiangnan University, China.
(2) Alejandro Gutiérrez- Rodríguez, Universidad Autónoma de Zacatecas, México.

Complete Peer review History: <http://www.sciencedomain.org/review-history/16351>

Original Research Article

Received 13th July 2016
Accepted 15th September 2016
Published 27th September 2016

ABSTRACT

The concept of mutual induction which arises from Faraday's law of electromagnetic induction is a major concern about the size of the magnetic flux cutting across a wire which is directly proportional to the induced Electromotive Force (e.m.f.), this is often time being thought without reference to a physical device. The methodology employed includes the construction and testing of a simple device called transformer. This device is made up of copper wire, thin insulated iron, output display meter, switch, fuse, simple handle and structural wooden case. With this device, an experiment is conducted to illustrate Faraday's law of electromagnetism. This work presents a suitable reproducible device for illustrating mutual induction of a coil. Using an analytical approach, the result obtained signified a step-down transformer. Based on the output result, the transformer can function effectively to give a low voltage output to electrical gadgets.

Keywords: Faraday's law of electromagnetic induction; mutual inductance; testing; transformer; Electromotive Force (e.m.f.).

*Corresponding author: E-mail: aliyurilwan94@gmail.com;

1. INTRODUCTION

Almost every modern device or machine has electric circuits as its heart. Electromotive force (e.m.f.) is required for current flow in a circuit where the source of EMF is the battery. But for vast majority of electric devices that are used in industry and in home (including any device that you plug on a wall socket), the source of e.m.f. is not battery but an electric generating station. Such a station produces electrical energy by converting other forms of energy. But how is this energy conversion done? [1]. The answer is a phenomenon known as electromagnetic induction. If the magnetic flux through a circuit changes, an e.m.f. and a current are induced in the circuit. In generator, magnet moves in relative to coils of wire to produce a changing magnetic flux in the coils and hence an e.m.f. [1]. The central principle of electromagnetic induction and the key note of this work is illustration of Faraday's law. In electromagnetism and electronics, inductance is the property of an electrical conductor by which a change in current flowing through it induces an electromotive force in both the conductor itself and in any nearby conductors by mutual inductance. These effects are derived from two fundamental observations of physics: A steady current creates a steady magnetic field described by Oersted's law; [2] and a time-varying magnetic field induces an electromotive force in nearby conductors, which is described by Faraday's law of induction [2]. Mutual inductance occurs when the change in current in one inductor induces a voltage in another nearby inductor. It is important as the mechanism by which transformers work, but it can also cause unwanted coupling between conductors in a circuit [3]. Referring to the above, the interest of this work is on a device that aided the transmission of electrical power. This device is called the transformer. A transformer can be defined as a static device which helps in the transformation of electrical power in one circuit to electric power of the same frequency in a circuit, but with a proportional increase or decrease in the current ratings [4]. In 1831 Michael Faraday formulated a law on the bases of his experiment. This law is called Faraday's Law of Electromagnetic induction, which states that whenever there is a change in magnetic flux linked with a circuit the induced e.m.f. is proportional to the rate of change of flux [5].

2. WORKING PRINCIPLE OF THE TRANSFORMER

The transformer works on the principle of mutual induction of coils. When electric current in primary coil is changed, the flux linked to the secondary coil also changed. Consequently, an electromotive force (e.m.f.) is induced in the secondary coil, thereby inducing electric current through the coil [6]. If N_p , N_s are the number of turns in primary and secondary coils respectively, their linkage with the flux, ϕ are considered using the equation below.

$$\phi_p = N_p AB \quad (1)$$

$$\phi_s = N_s AB \quad (2)$$

where A: is the cross-sectional area and B is the flux density [6].

The voltage applied to the primary, from the source of current is used simply in overcoming the back e.m.f. E_p , if the resistance of the wire is neglected therefore; it is equal in magnitude E_p . This can be written as:

$$\Sigma \text{turns} = \frac{\partial \phi B}{\partial t} = \frac{V_p}{N_p} = \frac{V_s}{N_s} \quad (3)$$

$$V_s = V_p \frac{N_p}{N_s} \quad (4)$$

$$V_p = V_s \frac{N_p}{N_s} \quad (5)$$

where N_s = number of turns in secondary Winding, N_p = number of turns in primary winding, V_s = Voltage in primary winding and V_p = Voltage in secondary winding.

Conversely the current relation is:

$$I_p = \frac{N_p}{N_s} \cdot I_s \quad (6)$$

$$I_s = \frac{N_p}{N_s} \cdot I_p \quad (7)$$

where: I_s is the current through the secondary winding, I_p is the current through the primary winding (the one connected to a power source), N_s is the number of turns in the secondary winding, and N_p is the number of turns in the primary winding [7].

3. MATERIALS AND METHODS

The transformer is planned based on the principle of step down transformer in which the numbers of turns in the input unit (primary winding) are more than the number of turns in the output unit (secondary winding). The procedures employed includes: construction and testing. The material used are ply wood, copper wire, volt meter, thin insulated iron, masking tape, fused, and a switch. While constructing the transformer, copper wire was wound on a rectangular insulated material. The primary winding was 300 turns, the secondary winding was 270 turns. With this, a step down transformer was anticipated as shown in the circuit diagram Figs. 1 and 2.

A transformer in which the secondary voltage is greater than the primary voltage is called a step-up transformer while a transformer in which the secondary voltage is less than the primary voltage is called a step-down transformer. The amount by which the voltage is stepped down depends on the turns ratio, the turns ratio of a step-down transformer is always less than 1. When a load resistor is connected to the secondary winding, there is a current through the resulting secondary circuit because of the voltage induced in the secondary coil.

After this has being done, a thin insulated soft iron usually E shaped slices were inserted into the space of the material tightly bound together so that magnetic flux does not pass through at all. Having done this, the secondary output wires were connected to a socket outlet which is mounted externally. An output display meter was attached to display the output voltage. At the back elevation, an alternating current (A.C) wire is connected to a fused from which the fuse is connected to a switch and the switch is connected to the primary input wire. Having constructed the transformer, it was cased in an improvised wooden case as shown in Fig. 3.

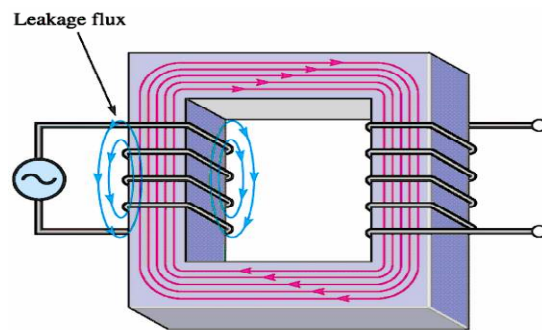


Fig. 1. Primary and secondary winding (Prof. Andrew H A 2004)

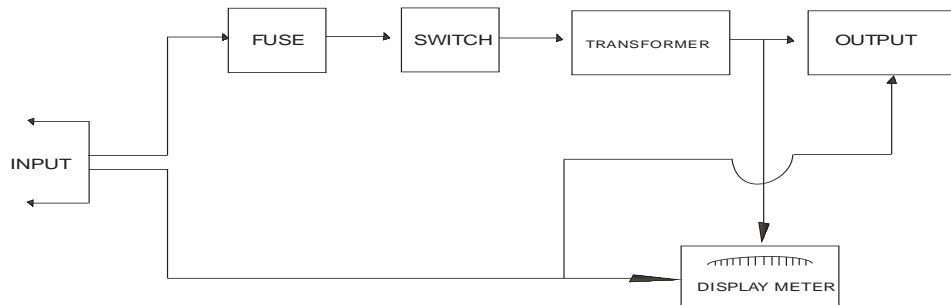


Fig. 2. Circuit diagram of the constructed device

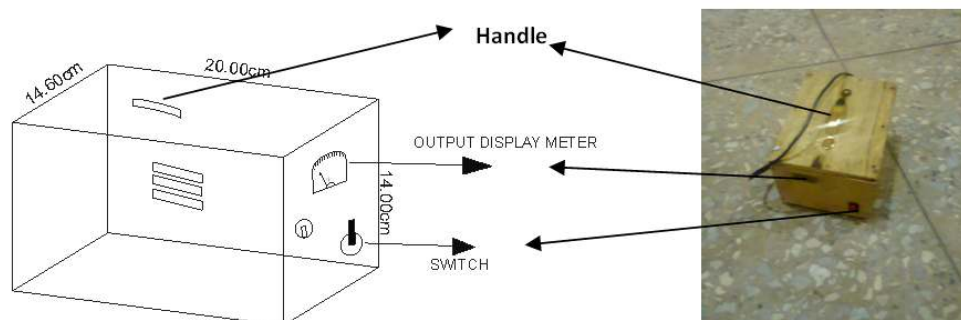


Fig. 3a. Front view of the cased transformer

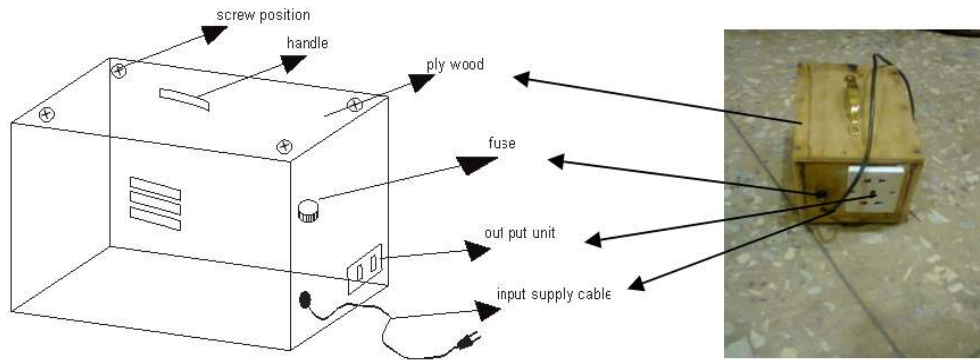


Fig. 3b. Back view of the cased transformer

Table 1. Variation of V_s with V_p for the same number of turns in N_s and N_p

Number of turns in primary winding (N_p)	Number of turns in primary winding (N_s)	Output voltage recorded, (Vs)	Input voltage recorded, (V_p)
300	270	220	244
300	270	150	167
300	270	100	111
300	270	50	56
300	270	20	22

The device is constructed using a locally source material, 13 arm socket outlet and a fuse is mounted at the back elevation of the device as seen in Fig. 3b above, the voltage at the outlet as measured shows that the device can function effectively for any electrical equipments with plug input equal to 13 arm socket outlet, this device can serve in place of a voltage stabilizer.

4. RESULTS AND DISCUSSION

The result of this transformer is based on the data recorded during the construction and testing of the transformer in Fig. 1.

Number of Primary Turns, $N_p = 300$, Number of Secondary Turns $N_s = 270$, Output Voltage recorded, $V_s = 220$ volt, Input Voltage recorded, $V_p = ?$

From equation (3)

$$V_p = V_s \cdot \frac{N_p}{N_s} \quad (8)$$

$$V_p = 220 \cdot \frac{300}{270} \quad (9)$$

$$V_p = 220 \times 1.11 = 244 \text{ volt} \quad (10)$$

For different value of V_s recorded from the device so also different value of V_p will be obtained. This

shows that the device is a step down transformer, since the input voltage is greater than the output voltage.

When the primary winding is connected to the power source, magnetic lines of force are developed around the windings and travels within the iron core as shown in Fig. 1. By electromagnetic induction principle, these magnetic lines of force travelling around the core induce another voltage to the secondary windings which gives the idea although the primary and the secondary windings are separated, a lower or higher voltage can be produced in the secondary winding [8]. In Fig. 2 above, is the circuit diagram showing the method in which the components were connected while Fig. 3 is the physical appearance of the cased transformer showing the position of each component mounted externally.

5. CONCLUSION

A device for illustrating Faraday's law of electromagnetic induction was constructed and tested it was effective. The Faraday's law of electromagnetic induction was illustrated alongside mutual induction of two coils in Fig. 1 above, the output voltage as seen on the indicator was 220 Volts. Using analytical approach, the input voltage was obtained to be 244 Volts signifying a step down transformer

which confirmed the result for step down transformer. Voltmeter was used to measure the input voltage from a socket outlet (national grid) and was found to be 240 Volts while the calculated input is 244 Volts, the variations between these two values is 4 Volts which may be due to experimental error. Based on the output result of the transformer constructed, the transformer can function effectively at home to give low voltage output to electrical gadgets.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Sears FW, Zemansky MW. University Physics: Third Edition (Complete Volume), Addison-Wesley Publishing Company, Inc. Reading MA, LCCC 63-15265 (no ISBN); 1964.
2. Sears, Zemansky. The work of Oersted thus demonstrated that magnetic effects could be produced by moving electric charges, and that of Faraday and Henry that currents could be produced by moving magnets. 1964;671.
3. Mahmood Nahvi, Joseph Edminister. Schaum's outline of theory and problems of electric circuits. McGraw-Hill Professional. 2002;338. ISBN 0-07-139307-2.
4. John. Transformer. CT circuit TODAY. Available: circuitstoday.com
5. Okeke PN. Senior Secondary Physics, 5th Ed. Ibadan University Press. 2012;262.
6. Nelkon M. Principles of Physics, Ninth Edition. London Collins Education; 1986.
7. Jackson JD. Classical electrodynamics. Wiley. 1975;262.
8. Poyser Arthur William. Magnetism and electricity: A manual for students in advanced classes. London and Newyork; Longman and co. 1892;285.

© 2016 Rauff et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
<http://sciencedomain.org/review-history/16351>